

RS2AF THRU RS2MF

Surface Mount Fast Recovery Rectifiers

FEATURES:

- · For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- · Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives

Circuit Diagram & Pin Configuration:



Cathode O-Anode

Marking

Type number	Marking code
RS2AF	RS2A
RS2BF	RS2B
RS2DF	RS2D
RS2GF	RS2G
RS2JF	RS2J
RS2KF	RS2K
RS2MF	RS2M

SMAF

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	RS2AF	RS2BF	RS2DF	RS2GF	RS2JF	RS2KF	RS2MF	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T_c = 125 °C	I _{F(AV)}	2							А
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	50							А
Maximum Forward Voltage at 2 A	V _F	1.3							V
Maximum DC Reverse Current $T_a = 25 \degree C$ at Rated DC Blocking Voltage $T_a = 125 \degree C$	I _R	5 100							
Typical Junction Capacitance at V_R =4V, f=1MHz	Cj	22							pF
Maximum Reverse Recovery Time ⁽¹⁾	t _{rr}	150 250 500					00	ns	
Typical Thermal Resistance ⁽²⁾	$R_{_{ extsf{ heta}JA}}$ $R_{_{ hetaJC}}$	65 20							°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150							°C

(1) Measured with $I_F = 0.5 A$, $I_R = 1 A$, $I_{rr} = 0.25 A$.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Tinysemi®

RS2AF THRU RS2MF

3.0 Average Forward Current (A) 2.5 2.0 1.5 1.0 0.5 Single phase half-wave 60 Hz resistive or inductive load 0.0 75 25 50 100 125 150 175 Case Temperature (°C)

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics





Fig.4 Typical Junction Capacitance







Fig.5 Maximum Non-Repetitive Peak Forward Surage Current



Tinysemi®

RS2AF THRU RS2MF


SMAF

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

∠ALL ROUND ∠ALL ROUND ł ⊲ υ - = V (M) A H_E F g g H-A D pad pad ш Φ Top View Bottom View UNIT А С D Е H_{E} е g \angle 1.2 0.20 3.7 2.7 1.6 1.2 4.9 max mm min 0.9 0.12 3.3 2.4 1.3 0.8 4.4 7° 7.9 106 193 146 63 47 max 47 mil min 35 4.7 130 94 51 31 173

The recommended mounting pad size

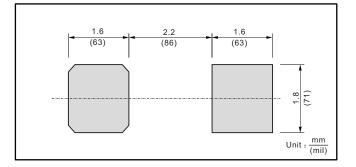

RS2AF THRU RS2MF

NOTICE

The information presented in this document is for reference only. Tinysemi reserves the right to make changes without notice for the specification of the products displayed herein.

Tinysemi

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tinysemi elec Co., Ltd., or anyone on its behalf, assumes noresponsibility or liability for any damagers resulting from such improper use of sale.

This publication supersedes & replaces all information reviously supplied. For additional information, please visit our website http://www.tinysemi.com , or consult your nearest Tinysemi' s sales office for further assistance.