

## Surface Mount Fast Recovery Rectifier

### FEATURES:

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

### Marking

| Type number | Marking code |
|-------------|--------------|
| RS3A        | RS3A         |
| RS3B        | RS3B         |
| RS3D        | RS3D         |
| RS3G        | RS3G         |
| RS3J        | RS3J         |
| RS3K        | RS3K         |
| RS3M        | RS3M         |

### Circuit Diagram & Pin Configuration:



### SMA/DO-214AC

#### Absolute Maximum Ratings and Characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Parameter  | Symbols                            | RS3A       | RS3B | RS3D | RS3G | RS3J | RS3K | RS3M | Units                |
|--|------------------------------------|------------|------|------|------|------|------|------|----------------------|
| Maximum Repetitive Peak Reverse Voltage  | $V_{RRM}$                          | 50         | 100  | 200  | 400  | 600  | 800  | 1000 | V                    |
| Maximum RMS voltage  | $V_{RMS}$                          | 35         | 70   | 140  | 280  | 420  | 560  | 700  | V                    |
| Maximum DC Blocking Voltage  | $V_{DC}$                           | 50         | 100  | 200  | 400  | 600  | 800  | 1000 | V                    |
| Maximum Average Forward Rectified Current at $T_c = 125\text{ °C}$                                       | $I_{F(AV)}$                        | 3          |      |      |      |      |      |      | A                    |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load                       | $I_{FSM}$                          | 80         |      |      |      |      |      |      | A                    |
| Maximum Forward Voltage at 3 A   | $V_F$                              | 1.3        |      |      |      |      |      |      | V                    |
| Maximum DC Reverse Current at Rated DC Blocking Voltage<br>$T_a = 25\text{ °C}$<br>$T_a = 125\text{ °C}$ | $I_R$                              | 5<br>100   |      |      |      |      |      |      | $\mu\text{A}$        |
| Typical Junction Capacitance at $V_R = 4\text{V}$ , $f = 1\text{MHz}$                                    | $C_j$                              | 32         |      |      |      |      |      |      | pF                   |
| Maximum Reverse Recovery Time <sup>(1)</sup>   | $t_{rr}$                           | 150        |      |      |      | 250  | 500  |      | ns                   |
| Typical Thermal Resistance <sup>(2)</sup>  | $R_{\theta JA}$<br>$R_{\theta JC}$ | 50<br>16   |      |      |      |      |      |      | $^{\circ}\text{C/W}$ |
| Operating and Storage Temperature Range  | $T_j, T_{stg}$                     | -55 ~ +150 |      |      |      |      |      |      | $^{\circ}\text{C}$   |


( 1 ) Measured with  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


**Fig.1 Maximum Average Forward Current Rating**

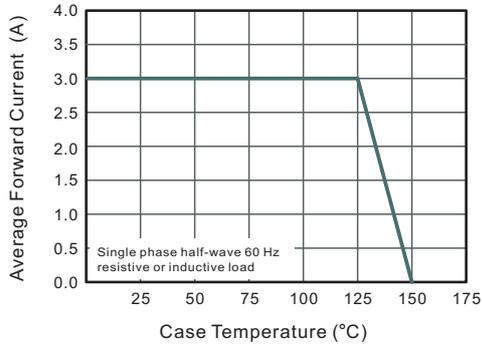


**Fig.2 Typical Reverse Characteristics**

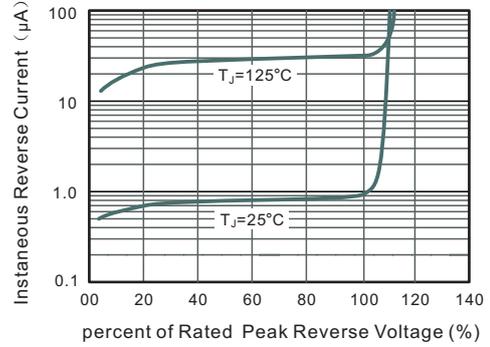


**Fig.3 Typical Instantaneous Forward Characteristics**

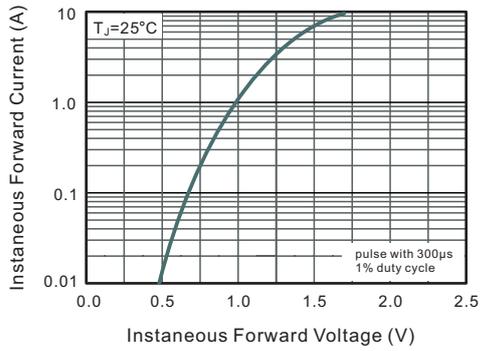

**Fig.4 Typical Junction Capacitance**

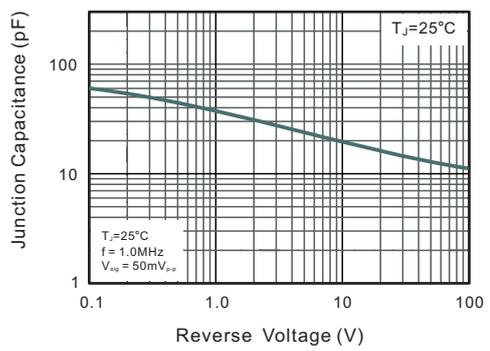


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

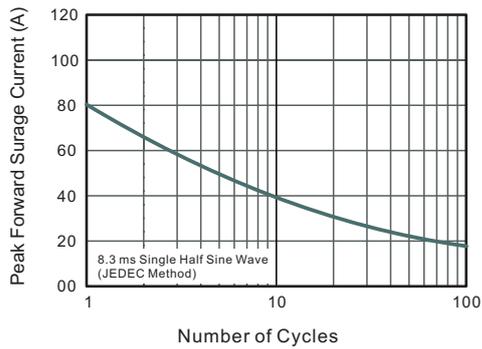


### PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMA/DO-214AC

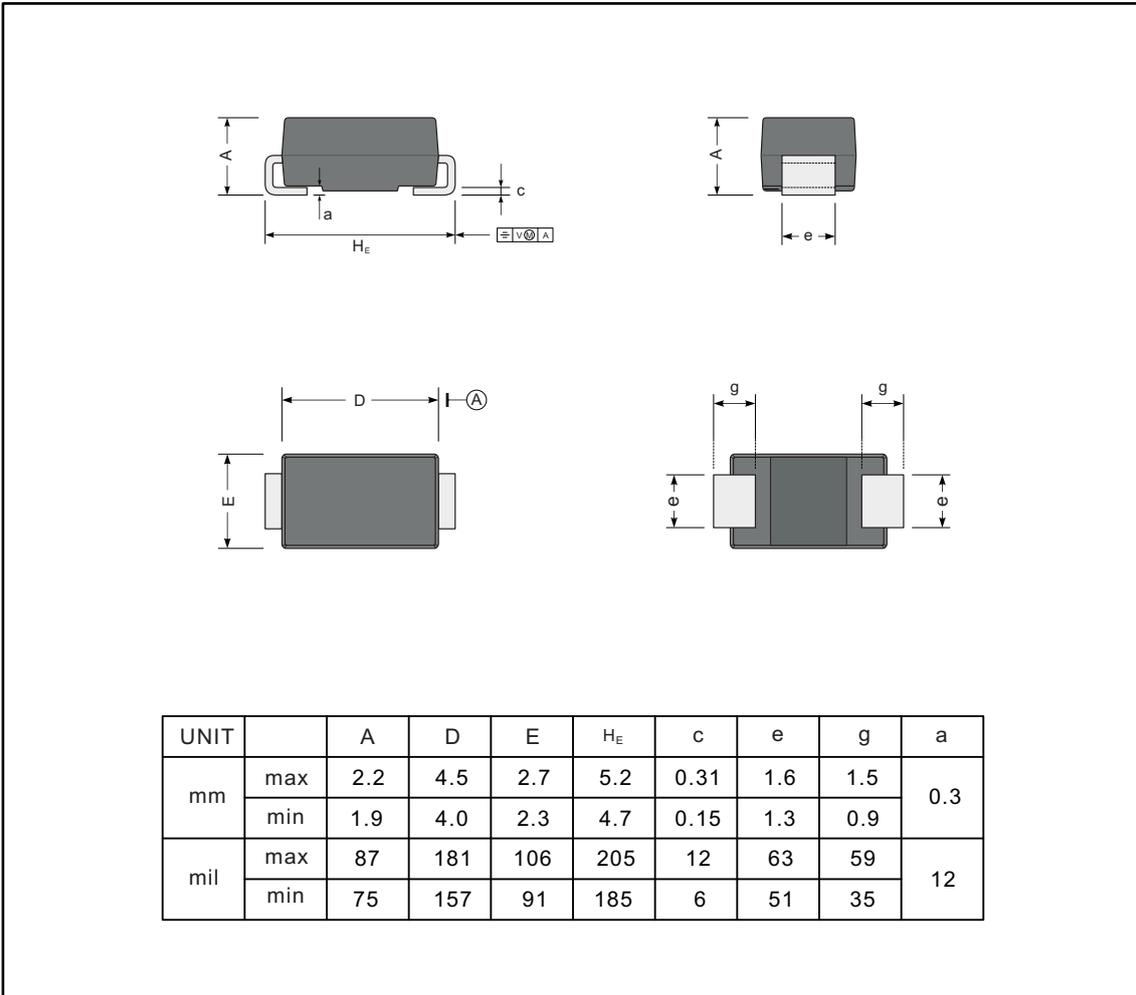

### The recommended mounting pad size

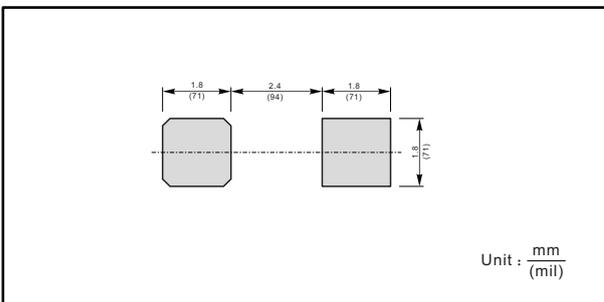

## NOTICE

The information presented in this document is for reference only. Tinysemi reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tinysemi elec Co., Ltd., or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.tinysemi.com>, or consult your nearest Tinysemi's sales office for further assistance.