

## RS3ABF THRU RS3MBF

### Surface Mount Fast Recovery Rectifiers

### **FEATURES:**

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives

### **Circuit Diagram & Pin Configuration:**





#### Marking

Type number	Marking code				
RS3ABF	R3AB				
RS3BBF	R3BB				
RS3DBF	R3DB				
RS3GBF	R3GB				
RS3JBF	R3JB				
RS3KBF	R3KB				
RS3MBF	R3MB				

SMBF

#### Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	<b>RS3ABF</b>	RS3BBF	RS3DBF	RS3GBF	RS3JBF	RS3KBF	RS3MBF	Units
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_c$ = 125 °C	I <sub>F(AV)</sub>	3							А
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I <sub>FSM</sub>	80							А
Maximum Forward Voltage at 3 A	V <sub>F</sub>	1.3							V
Maximum DC Reverse Current $T_a = 25 \degree C$ at Rated DC Blocking Voltage $T_a = 125 \degree C$	I <sub>R</sub>	5 100							μA
Typical Junction Capacitance at $V_R$ =4V, f=1MHz	Cj	40							pF
Maximum Reverse Recovery Time <sup>(1)</sup>	t <sub>rr</sub>	150 250 500					00	ns	
Typical Thermal Resistance <sup>(2)</sup>	${\sf R}_{_{ extsf{ heta}JA}}$ ${\sf R}_{_{ hetaJC}}$	45 15							°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-55 ~ +150							°C

( 1 ) Measured with  $I_{\scriptscriptstyle F}$  = 0.5 A,  $I_{\scriptscriptstyle R}$  = 1 A,  $I_{\scriptscriptstyle rr}$  = 0.25 A.

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

# R Tinysemi

## **RS3ABF THRU RS3MBF**




Fig.1 Maximum Average Forward Current Rating




Fig.3 Typical Instaneous Forward

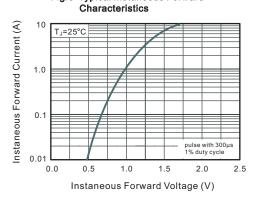


Fig.5 Maximum Non-Repetitive Peak Forward Surage Current

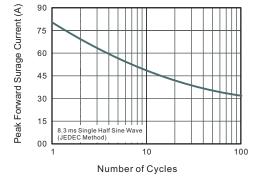


Fig.2 Typical Reverse Characteristics


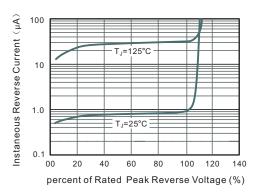


Fig.4 Typical Junction Capacitance

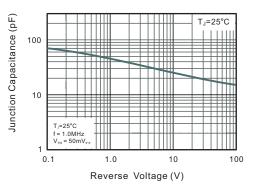


# Tinysemi®

## RS3ABF THRU RS3MBF


### PACKAGE OUTLINE

### Plastic surface mounted package; 2 leads

SMBF

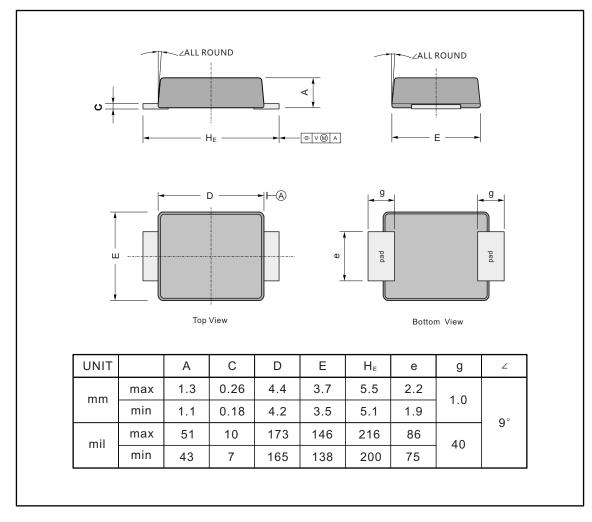

### The recommended mounting pad size

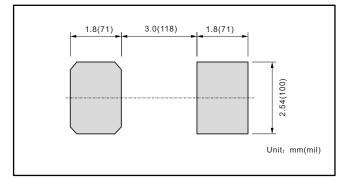

# Tinysemi®

## RS3ABF THRU RS3MBF

## NOTICE

The information presented in this document is for reference only. Tinysemi reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tinysemi elec Co., Ltd., or anyone on its behalf, assumes noresponsibility or liability for any damagers resulting from such improper use of sale.

This publication supersedes & replaces all information reviously supplied. For additional information, please visit our website http://www.tinysemi.com , or consult your nearest Tinysemi' s sales office for further assistance.