

Surface Mount Ultrafast Recovery Rectifier

FEATURES:

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

Circuit Diagram & Pin Configuration:





SMB/DO-214AA

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	US3AB	US3BB	US3DB	US3GB	US3JB	US3KB	US3MB	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _{F(AV)}	3						А	
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	90						А	
Maximum Instantaneous Forward Voltage at 3 A	V _F	1.0 1.3 1.68						V	
Maximum DC Reverse Current $T_a = 25 ^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_a = 125 ^{\circ}\text{C}$	I _R	5 100						μА	
Maximum Reverse Recovery Time (1)	t _{rr}	50 75					ns		
Typical Thermal Resistance (2)	$R_{ heta JA} \ R_{ heta JC}$	45 15						°C/W	
Operating and Storage Temperature Range	T_{j}, T_{stg}	-55 ~ +150						°C	

^(1) Measured with $I_{\scriptscriptstyle F}$ = 0.5 A, $I_{\scriptscriptstyle R}$ = 1 A, $I_{\scriptscriptstyle rr}$ = 0.25 A.

Marking

Type number	Marking code				
US3AB	US3A				
US3BB	US3B				
US3DB	US3D				
US3GB	US3G				
US3JB	US3J				
US3KB	US3K				
US3MB	US3M				

⁽ 2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Fig.1 Maximum Average Forward Current Rating




Fig.2 Typical Reverse Characteristics




Fig.3 Typical Forward Characteristics





Fig.4 Maximum Non-Repetitive Peak Forward Surage Current







PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMB/DO-214AA

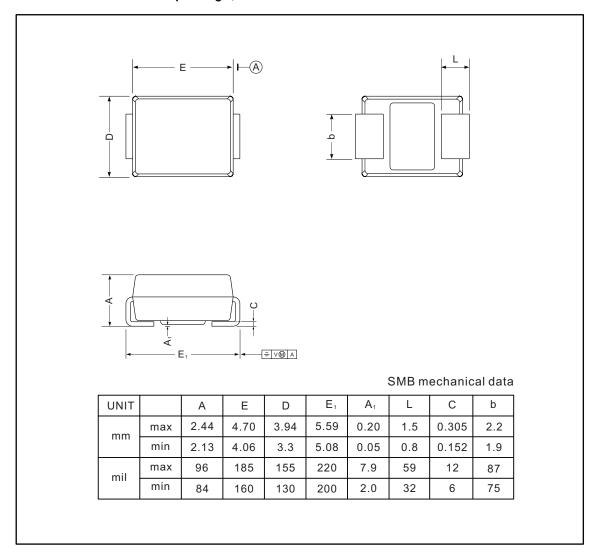

The recommended mounting pad size

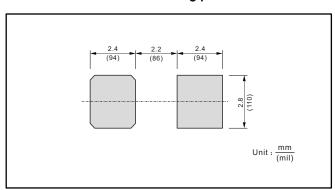



NOTICE

The information presented in this document is for reference only. Tinysemi reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tinysemi elec Co., Ltd., or anyone on its behalf, assumes noresponsibility or liability for any damagers resulting from such improper use of sale.

This publication supersedes & replaces all information reviously supplied. For additional information, please visit our website http://www.tinysemi.com , or consult your nearest Tinysemi's sales office for further assistance.