


General Purpose Transistors PNP Silicon


FEATURES:

- We declare that the material of product compliance with RoHS requirements.

Circuit Diagram & Pin Configuration:



SOT-323/SC-70



DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
TMBT2907AW	20	3000/Tape&Reel

MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Collector–Emitter Voltage	VCEO	-60	V
Collector–Base Voltage	VCBO	-60	V
Emitter–Base Voltage	VEBO	-5	V
Collector Current — Continuous	IC	-600	mA

THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Total Device Dissipation, FR-5 Board (Note 1) @ TA = 25°C	PD	150	mW
Thermal Resistance, Junction–to–Ambient(Note 1)	RθJA	833	°C/W
Junction and Storage temperature	TJ,Tstg	-55~+150	°C

1. FR-5 = 1.0×0.75×0.062 in.

ELECTRICAL CHARACTERISTICS (Ta= 25°C)
OFF CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Collector–Emitter Breakdown Voltage (IC = -10 mA, IB = 0)	VBR(CEO)	-60	-	-	V
Collector–Base Breakdown Voltage (IC = -10 μ A, IE = 0)	VBR(CBO)	-60	-	-	V
Emitter–Base Breakdown Voltage (IE = -10 μ A, IC = 0)	VBR(EBO)	-5	-	-	V
Collector Cutoff Current (VCE = -30 V, VEB(off) = -0.5V)	ICEX	-	-	-50	nA
Base Cutoff Current (VCE = -30 V, VEB(off) = -0.5V)	IBL	-	-	-50	nA

ON CHARACTERISTICS (Note 2.)

DC Current Gain (IC = -0.1 mA, VCE = -10 V) (IC = -1.0 mA, VCE = -10 V) (IC = -10 mA, VCE = -10 V) (IC = -150 mA, VCE = -10 V) (IC = -500 mA, VCE = -10 V)	HFE	75 100 100 100 50	- - - - -	- - - 300 -	
Collector–Emitter Saturation Voltage (IC = -150 mA, IB = -15 mA) (IC = -500 mA, IB = -50 mA)	VCE(sat)	- -	- -	-0.4 -1.6	V
Base–Emitter Saturation Voltage (IC = -150 mA, IB = -15 mA) (IC = -500 mA, IB = -50 mA)	VBE(sat)	- -	- -	-1.3 -2.6	V

SMALL–SIGNAL CHARACTERISTICS





Current–Gain — Bandwidth Product (IC = -50mA, VCE= -20V, f = 100MHz)	fT	200	-	-	MHz
Output Capacitance (VCB = -10 V, IE = 0, f = 1.0 MHz)	Cobo	-	-	8	pF
Input Capacitance (VEB = -2 V, IC = 0, f = 1.0 MHz)	Cibo	-	-	30	pF



SWITCHING CHARACTERISTICS

Turn–On Time	(VCC = -30 V, IC = -150 mA, IB1 = -15 mA)	ton	-	-	45	ns
Delay Time		td	-	-	10	
Rise Time		tr	-	-	40	
Storage Time	(VCC = -6 V, IC = -150 mA, IB1 = IB2 = -15 mA)	ts	-	-	225	
Fall Time		tf	-	-	60	
Turn–Off Time		toff	-	-	280	


2.Pulse Test: Pulse Width $\leq 300 \mu$ s, Duty Cycle $\leq 2.0\%$.

ELECTRICAL CHARACTERISTICS CURVES

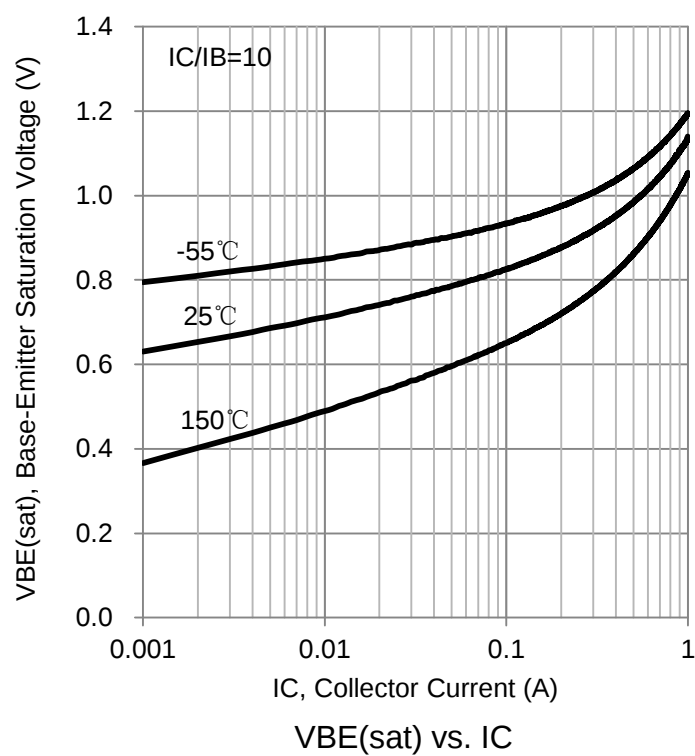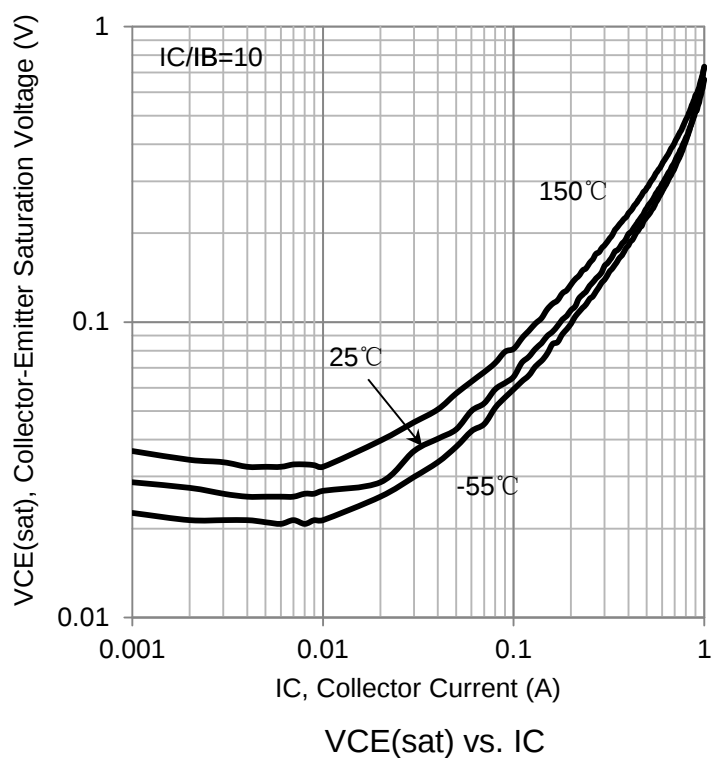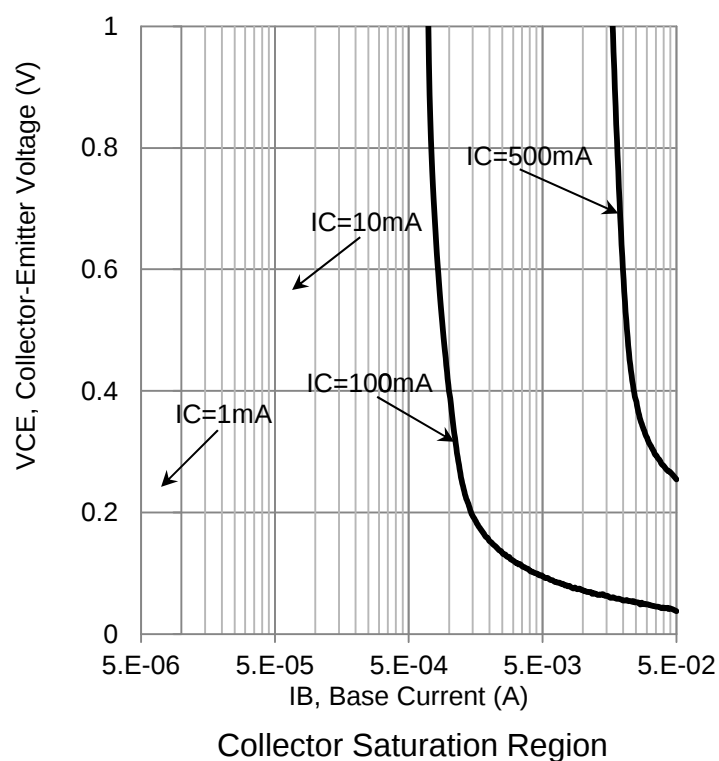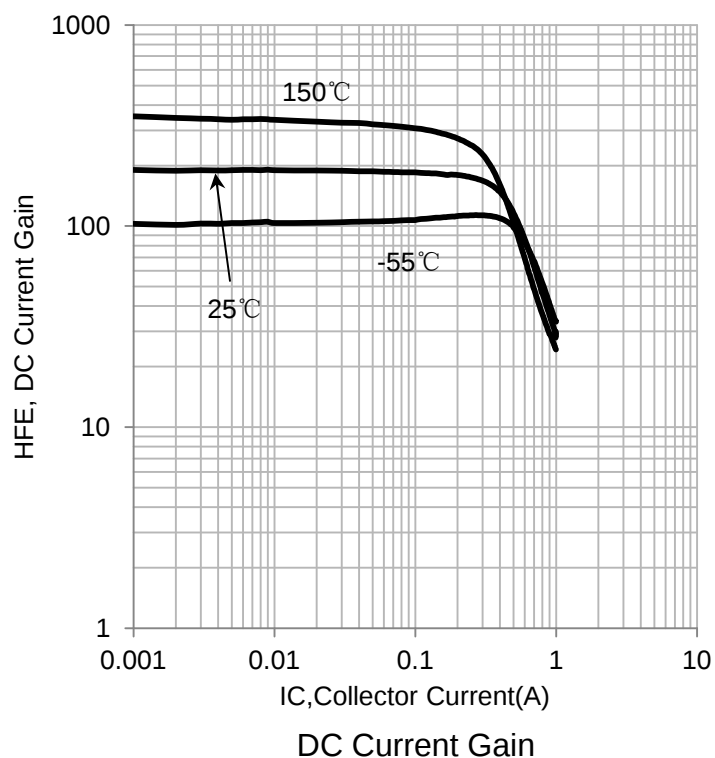

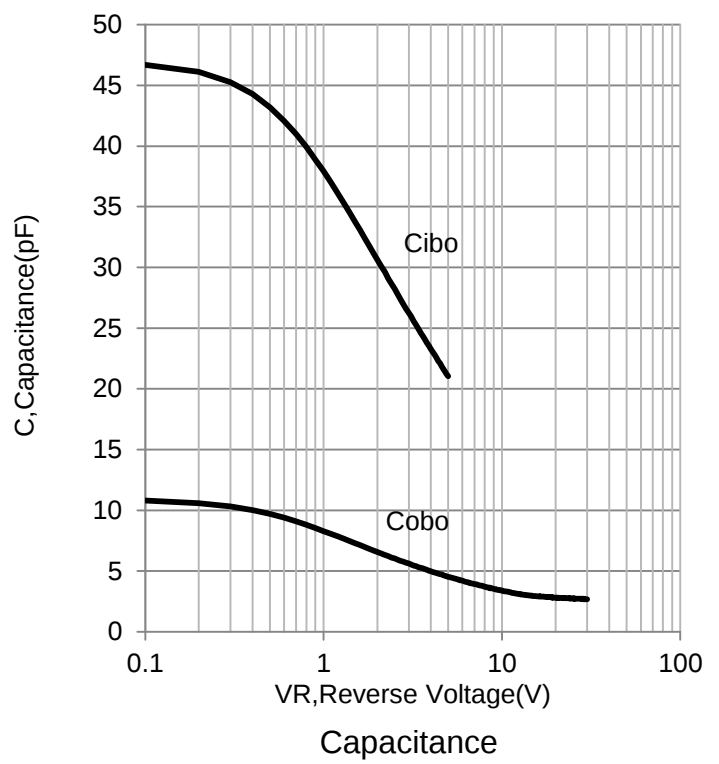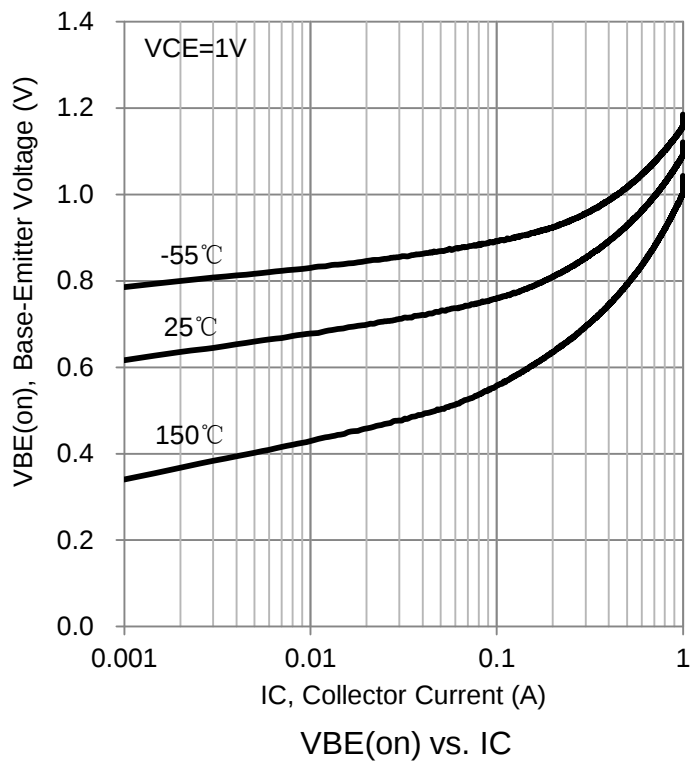
ELECTRICAL CHARACTERISTICS CURVES(Con.)


OUTLINE AND DIMENSIONS

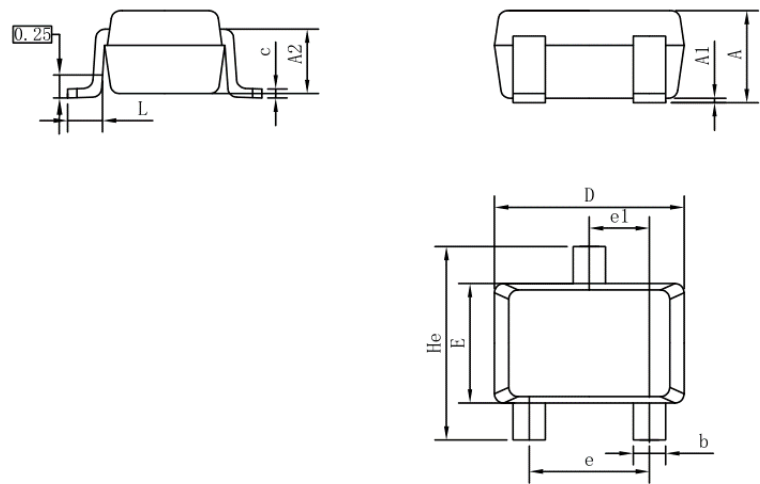

SC70			
DIM	MIN	NOR	MAX
A	0.80	0.95	1.00
A1	0.00	0.05	0.10
A2	0.7 REF		
b	0.30	0.35	0.40
c	0.10	0.15	0.25
D	1.80	2.05	2.20
E	1.15	1.30	1.35
e	1.20	1.30	1.40
e1	0.65 BSC		
L	0.20	0.35	0.56
He	2.00	2.10	2.40
ALL Dimension in mm			

SOLDERING FOOTPRINT

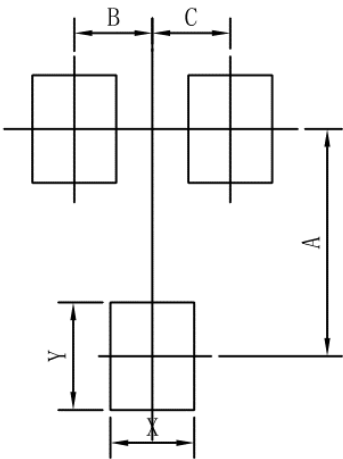

SC70	
DIM	MIN
A	1.90
B	0.65
C	0.65
X	0.70
Y	0.90

NOTICE

The information presented in this document is for reference only. Tinysemi reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tinysemi elec Co., Ltd., or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.tinysemi.com> , or consult your nearest Tinysemi' s sales office for further assistance.